FALL & WINTER



RE-TOOL YOUR METAL SHOP



THE TOOL & EQUIPMENT STORE

2205, Robertson Road, Nepean, ON K2H 5Z2 700-3020 Hawthorne Rd. Ottawa, ON K1G 3J6 Phone: (613) 828-5311 Email: sales@ottawafastenersupply.com • www.ottawafastenersupply.com

PRICES IN EFFECT UNTIL DECEMBER 31st, 2024

MILLING DRILLING MACHINE with SAFETY GUARD & LIMIT SWITCH

PDM-30

- 16 1/2" swing1 1/4" Drilling capacity3" Face mill capacity
- 5" strokeSpindle taper R8
- 12 speeds (150-2500 RPM)

OPTIONA

TABLE **POWERFEED ATTACHMENT** PFM-32

\$679

5 PC. ACCESSORY BONUS PACKAGE FREE

OPTIONAL **MILLING DRILLING**

MACHINE STAND SS-45 **\$399** 99

STATIONARY 6.5 PEAK HP **60 GALLON AIR COMPRESSOR** KC-6160V2

150 PSI max pressure 13.4 CFM @ 40 PSI

11.2 CFM @ 90 PSI

2 cylinder cast iron single stage oil lubricated pump



• 11.5 Amp. motor

- Coolant system
- Adjustable ball bearing guides
 4 speeds (85-130-180-235 FPM)



H.S.S. & BI-METAL BLADES ("SKIP TOOTH") Blade Material TPI Length Widt

The Most Innovative Drill Presses DVR WITH ADAPTIVE CONTROL™ SOFTWARE



16" NOVA VIKING DVR DRILL PRESS 83705

11 Amp. (220V)

\$2999.

KING

Thermally protected

Marathon® 6.5 peak

HP motor with reset

- Powerful direct drive 1 HP high torque motor with no pulleys or belts Spindle taper MT #2 Comes with 5/8" drill ch
- & key, firmware \$1699

18" NOVA VOYAGER **DVR DRILL PRESS** 58006

- Powerful direct drive
 1.75 HP high torque motor
 with no pulleys or belts
 Spindle taper MT #2

 Comments for the land
- Comes with 5/8" drill ch & key, firmware USB ca 399

3200 PSI GASOLINE HIGH PRESSURE WASHER KPW-3200

3200 PSI, 2.5 GPM maximum water flow

Low oil shut-off system Comes with stainless steel wand, 30' high pressure hose, garden hose inlet with screen filter, 12" wheels for portability and 5 quick connect nozzles (0°, 15°, 25°, 40° and

detergent) Powerful 7 HP, 4 stroke air cooled OHV engine 16" X 20" COMBO

LATHE/MILL - KC-1620CLM Comes with 5"- 3 jaw chuck, imperial & metric change gears, quick change tool post with 1/2" capacity, steady rest, follow rest, thread

chasing dial indicator, MT#3 & MT#4 dead centres,1/2" drill chuck and tool box with adjusting tools

Two powerful 3/4 HP 110V motors

MEIN



OPTIONAL KM-124 Elevating block with 7/16" T-slots (7-7/8" x 5-7/8" x 5") \$199

11 PC. METAL LATHE CUTTER SET KM-146 3/8" Shank KC-1022MI



10000W TRI-FUEL GENERATOR

WITH ELECTRIC START

KCG-10002GE-TF Powerful 15 HP, 4 stroke air cooled OHV engine AVR system and electronic ignition

Low oil shut-off with indicator light protects the engine
 Two duplex outlets: 120V/20 Amp. AC

MEIN

Two twist lock outlets: 120V/30 Amp. and 120V/240V/ 30 Amp. AC



11000W TRI-FUEL DIGITAL INVERTER GENERATOR

KCG-11000i-TF

Powerful 18 HP, 4 stroke air cooled motor
DC dual USB ports: 5V/3.1 Amp. DC output for charging

AC duplex outlet: 120V/240V 30 Amp. AC output

AC twist lock outlet: 120V/240V 30 Amp. AC output






FAGOR DIGITAL READOUT SYSTEMS **METAL LATHES & ACCESSORIES** 526.230 7" X 12" х 5.5 Amp. (110V) **INCLUDES - 4"- 3 JAW CHUCK & STEADY REST** 4 5 6 Y 1 2 - 47.895 VARIABLE SPEED MINI METÄL LÄTH<mark>E</mark> 0 . Θ KC-0712ML 3/4" spindle bore Variable speeds 2 (0-1100, 0-2500 RPM) Comes complete with quick change gear box, face plate, replacement **20i-T-840** (Fits KC-1440ML-6 & KC-1440ML-2) 20i-T-1040 gears, 4-way tool post, MT#2 dead center, threading dial indicator (Fits KC-1640ML) **\$1150**. 2 AXIS with 2 AXIS with Θ 8" x 40" scales 10" x 40" scales 10" X 22" \$2499. \$2699. 12 Amp. (110V) CABINET **BELT DRIVE METAL LATHE** STAND KC-1022ML **LIVE CENTERS** S-1022 • 1" spindle bore · Spindle speeds 6 (150-2400) RPM KING · Comes complete with 5"-3 jaw chuck, 6-1/2"-4 jaw chuck, replacement gears, 4 way tool post, steady rest, follow rest, \$69. 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, and chuck key KLC-3M KLC-2M TAPER SHANK -TAPER SHANK MT#2 7 PC. CARBIDE 12" X 36" **CUTTER HOLDERS** 1.5 HP GEARHEAD METAL LATHE (220V)2 positions carbide indexable Cutter Inserts (5pc.) • 1 1/2" spindle bore • H.S.S. inserts (2pc.) • Spindle speeds 9 (60-1500) RPM 40(4-112 T.P.I) 30(.2 - 4.5mm) thread cutting **INCLUDED** Comes complete with 6"-3 jaw chuck, 8"-4 jaw chuck, imperial and metric Screwdriver and gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face 3 adjustment keys KING plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, and chuck keys WITH TAPER ATTAC<mark>HMENT</mark> KC-1236ML/SS-1236 BONUS KC-1236ML/SS-1236/KM-053 **KM-047** 3/8" Shank KM-057 CABINET ST INCLUDED 5/8" <u>Sha</u>nk \$5999. \$6499 \$199. Fits Models: Fits Models. KC-0712ML, KC-1022ML KC-1236ML, 14440ML-2 14440ML-6,KC-1640GH, 14" X 40" 2 HP Θ (240V)KC-1640ML & KC-1660GH GEARHEAD METAL LATHE Spindle speeds 8(70-2000 RPM) 2" Spindle Bore 34(4-56 T.P.I) 26(.4 - 7mm) thread cutting Comes complete with 7"-3 jaw chuck, 8"-4 jaw chuck, replacement gears quick change tool post, steady rest, follow rest, 12" DI-5 camlock face plate, coolant system, full length splash guard, thread chasing dial indicator, 2 MT#3 dead centers, MT#6-MT#3 sleeve, tool box, chuck keys, and cabinet stand with foot brake WITH TAPER ATTACHMENT Taper Attachment must be KC-1440ML-2 KC-1440ML-2/KM-054 ordered together with \$9499. These Taper Attachments are designed to fit our 12" x 36", 14" x 40" & 16" x 40" CABINET STAND WITH FOOT BRAKE INCLUDED Metal Lathes models KC-1236ML, KC-1440ML-2 & KC-1640ML 4 HP 7 PC. QUICK CHANGE 16" X 40" (600V) TOOL POST KITS **HIGH PRECISION** "TOOL ROOM" METAL LATHE Spindle speeds 16(45-1800 RPM) 2" spindle bore diameter 45(2-72 T.P.I) thread cutting **KQCT-0012** Comes complete with 8"-3 jaw chuck with inside & outside jaws, Fits most lathes up to 0 to 12" swing 12"-4 jaw chuck, quick change tool post and two 3/4" tool holders, steady and follow rests with roller guides, 14" (D1-6) 8 camlock face plate, MT #4 standard dead centre, MT #4 carbide KING KQCT-1015 tipped dead centre, MT #4 to MT #6 spindle sleeve adapter, Fits most lathes between 10" to 15" swing coolant system, manual micrometer carriage stop, tool box and wrenches WITH TAPER ATTACHMENT **KQCT-1318** KC-1640ML/KM-055 Fits most lathes between \$499.99 13 "to 18" swing KC-1640ML

CABINET STAND WITH FOOT BRAKE INCLUDED



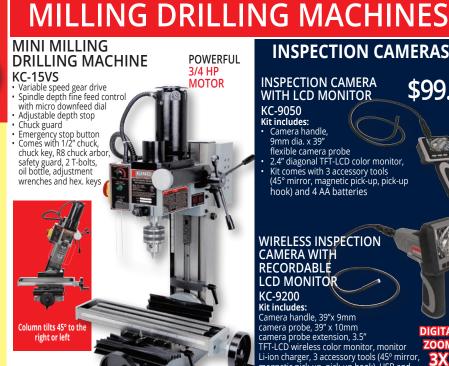







MACHINE STAND

SS-20VS

\$329











KC-129C

PORTABLE VARIABLE SPEED 5" x 6" METAL CUTTING BANDSAW

KC-8377

Variable speed 0-420 SFPMCutting capacity of 5" x 5" Blade tension lever · Comes with standard 44-7/8" x 1/2" blade



OPTIONAL Miter Stand turns this Bandsaw into a Cut-off Saw SS-8377



\$99.99

METAL CUTTING BANDSAW

3 speeds (80-120-200 FPM)

· Comes with wheels for portability

8 Amp. (110V)



				BI-METAL BLA			
	Model	Length	Width	Blade Material	TPI	Thickness	
AALA STATEMENT OF	KBB-115-10	64 1/2"	1/2"	H.S.S.	10	.025"	\$19.99
64 T DESCRIPTION	KBB-115-14	64 1/2"	1/2"	H.S.S.	14	.025"	\$19.99
	KBB-115-18	64 1/2"		H.S.S.	18	.025"	\$19.99
	KBB-115-24	64 1/2"	1/2"	H.S.S.	24	.025"	\$19.99
The same of	KBB-115-BM-10	64 1/2"	1/2"	Bi-Metal	10	.025"	\$39.99
	KBB-115-BM-14	64 1/2"		Bi-Metal	14	.025"	\$39.99
	KRR-115-RM-18	64 1/2"	1/2"	Ri-Metal	18	025"	\$39.99

5" x 6" **ADJUSTABLE** HÝDRAULIC **DUAL SWIVEL METAL CYLINDER CUTTING BANDSAW** KC-129DS Head swivels 0° - 45° to the right and 0° - 60° to the left Adjustable hydraulic downfeed control Automatic shut-off switch KING 8 Amp. (110V) \$999.

10" x 18"

METAL CUTTING BANDSAW KC-227-2 (220V)

KC-227-6 (600V)

- 4 speeds (114, 196, 288, 377 FPM) Carbide ball bearing blade guide
- · Control panel with automatic shut-off
- Adjustable hydraulic downfeed control
- Both adjustable control arms can be positioned as close to the cut as possible

Coolant system with regulator valves





10" x 18" VARIABLE SPEED SWIVEL METAL CUTTING BANDSAW 11.5 Amp. @ 220V 2.6 Amp. @ 600V

KC-228S-V-2 (220V)

KC-228S-V-6 (600V)



METAL CUTTING BANDSAWS

7" x 12" DUAL SWIVEL METAL CUTTING BANDSAW KC-712DS

6 Amp. (220V)

Returning coolant system
 4 speeds (98-164-246-328 FPM)
 Automatic shut-off
 Adjustable ball bearing guides



7" x 12" NOVA DVR METAL CUTTING BANDSAW

· Smart metal bandsaw features state of the art technology

Digital Variable Reluctance (DVR) Direct Drive 1 HP motor with Adaptive ControlTM Software

Constant torque under load and electronic braking emergency stop

Includes a 240V conversion components kit





9" x 18" METAL CUTTING SWIVEL BANDSAW KC-918S-V (8 Amp. 220V) KC-918S-V- 600V (2.5 Amp. 600V)

- Returning coolant system
 Variable speeds (80-250 FPM)
 Carbide ball bearing blade guides with rollers
 Centralized control panel and automatic shut-off

- Adjustable hydraulic downfeed control
 Precision blade tension adjustment
 Head swivels 0° to 45° in one direction
 Quick-positioning vise with fully adjustable jaws for 0° to 45° angles

VARIABLE SPEED METAL/WOOD CUTTING **BANDSAW**

KC-1700WM-VS

- Variable speeds (wood): 540-3600 SFPM
- Variable speeds (metal): 100-650 SFPM
- Voltage (input power): 220V, 1 phase, 60 Hz Comes with a 1/2" x 6 TPI wood cutting blade, 1/2" x 10 TPI metal cutting blade, laser guide, work lamp, miter gauge and a precision "TRU-RIP" aluminum rip fence with resaw guide

18" **METAL CUTTING BANDSAW**

KC-450

- Variable speed
- Handwheel controls speed
- · Speed changes while the machine is in operation
- Comes complete with 4-way tilting table, and work light







3" X 79" METAL BELT SANDER

2 HP

(220V)

KING

\$1099.



made 80 Grit pure

Price

\$19.99

\$19.99

BENCH GRINDER **STAND** SS-150N

- Made of cast-iron & alloy steel
- Height of 31-1/2' from the floor
- Water reservoir for quenching workpieces



NEW

8" LOW SPEED BENCH GRINDER WITH LIGHT

grinding wheels



KC-895LS

Comes complete with diamond wheel dressing tool, tool rests, eye shields, course 60 grit and fine 120 Grit 8" x 1" white aluminum

\$159.⁹⁹



2 HP METAL DUST COLLECTOR

Belt Size | Grit | Unit |

60

80

120

Sanding belt rotates on 7-1/2" vented drive

wheel and solid rubber rear wheel for

maximum tracking and sanding control

Head pivots up or down on base for easy

KC-7300C

3"x 79" PURE ZIRCONIA SANDING BELTS

3"x79"

KC-379MS

height of 36"

Hinged top cover

larger pieces

SB-379-60

SB-379-80 3"x79" SB-379-120 3"x79"

for access to entire length of belt for

and safe work heights Horizontal working

- Powerful 2 HP, 220V motor
- 2 Step activation safety switch with line voltage interruption
- Ideal for collection of metal chips and abrasive dust produced by metal sanders, grinders, cold cut saws, deburring and chamfering machines
- Large metal chips colection drawer
- 6" inlet with Y-inlet adaptor with two 3" dust inlets allowing up to connect up to two metalworking machines
- Comes with large paper filter and iron activated carbon filter

10" WET/DRY SHARPENER KIT KC-4900S

1.6 Amp. motor quietly rotates at 115 RPM for maximum precision during sharpening Comes with angle guide

honing compound and a square edge jig for sharpening a variety of blades and wood chisels



OPTIONAL

\$79.99

4 pc. Accessory Kit

KM-130

(Short knife jig, long knife jig, scissors jig & axe jig



DIGITAL FRACTIONAL CALIPER KM-106

Converts to inches (decimal and fractional) and metric readings

Waterproof to IP54 standards

Two 3V Lithium batteries included



FIREPROOF 3" METAL DUST COLLECTION HOSES KIT

KM-102

Kits Includes: 2 - 8ft. (2.5M) Fireproof hoses 4 - hose clamps (3")

KMAG-220-1721

\$**79**.⁹⁹

130°C



- Arbor shaft diameter: 5/8" Motor no load speed: 1,750 RPM Comes with two 8" x 1/2" spiral sewn cloth buffing wheels

\$159.99



2PC. 8" X 1/2" BUFFING WHEEL KIT KM-131 \$39.99



HEAVY-DUTY BENCH GRINDER WITH **FLOOR**

STAND KC-1295

- Cast-iron wheel guards and dust vents with 2-1/2" T-fitting adaptor for dust collection
 - · Built-in cast-ironquench tray, 36 Grit and 60 Grit 12" x 2" grinding wheels

MAGNETIC SWITCHES Comes with twist lock emergency stop button

\$129.99 ea.

220V (17-21 Amp.)

000

KMAG-110-811 110V (8-11 Amp.) KMAG-110-1114 110V (11-14 Amp.) KMAG-110-1417 110V (14-17 Amp.) KMAG-220-811 220V (8-11 Amp.) KMAG-220-1114 220V (11-14 Amp.) KMAG-220-1417 220V (14-17 Amp.)

2" X 42" BELT & 8" DISC SANDER KC-770FX

Both a 1" and a 2" sanding belt can be installed

Comes with 1" x 42" sanding belt, 2" x 42" sanding belt, 1" & 2" belt platens, 2 x 8" adhesive sanding discs, miter gauge and adjustment hex. keys



\$499

2"x 42" PL SANDING	JRE ZIRO BELTS	ONIA	, (50	PURE SAND
Model	Belt Size	Grit	Unit	Price	Model
SB-242-60Z	2"x42"	60	1	\$9.99	SB-8-60
	2"x42"	80	1	\$9.99	SB-8-80
SB-242-100Z	2"x42"	100	1	\$9.99	SB-8-10
SB-242-120Z	2"x42"	120	1	\$9.99	SB-8-12

PURE ZIRO SANDING	ONIA 8 DISCS	3"	(
Model	Disc Size	Grit	Unit	Price
SB-8-60Z	8"	60	1	\$9.99
SB-8-80Z	8"	80	1	\$9.99
SB-8-100Z	8"	100	1	\$9.99
CR 9 1207	Q"	120	1	¢0 00





5.5 PEAK HP 20 GALLON AIR COMPRESSOR

KC-2051H2

• 6.0 CFM @ 90 PSI

• 150 PSI max pressure • 7.6 CFM @ 40 PSI

2 cylinder cast iron single stage oil lubricated pump



AIR TOOL KIT

Comes with 1/2" Impact Wrench, 3/8"

8171

HIGH OUTPUT 6.5 PEAK HP 60 GALLON AIR COMPRESSOR

KC-5160V2

150 PSI max pressure • 22.6 CFM @ 40 PSI

3 cylinder cast iron single stage oil lubricated pump

71 PC.

AIR COMPRESSORS & ACCESSORIES

SPRAY GUN KITS 8185

8180 8182









INDUSTRIAL 2- STAGE AIR COMPRESSORS

2-STAGE 5 RUNNNING HP **80 GALLON AIR COMPRESSOR**

KC-5280V3-MS

• 200 PSI max pressure • 19 CFM @ 175 PSI

2 cylinder cast iron 2-stage oil lubricated pump

2-STAGE 7.5 RUNNING HP **80 GALLON AIR COMPRESSOR**

KC-7280V3-MS

 200 PSI max pressure • 24 CFM @ 175 PSI

2 cylinder cast iron 2-stage oil lubricated pump









99





PREMIUM HYBRID POLYMER **GARDEN HOSES** Extreme All-Weather Flexibility Kink resistant K-5058GH 5/8" x 50 ft. K-10058GH 5/8" x 100 ft. \$45.

\$ / /. 150 PSI (Working) / 450 PSI (Burst)



300 PSI MAXIMUM PRES	SU





\$3499.

All-Weather Flexibility (-40°C to 65°C)

Comes with wall mounting hardware



Powerful 6.5 Peak HP motor

Convenient 18 ft. power cord

16 US Gallon (60L)

8560LST

REEL WITH HYBRID **POLYMER AIR HOSE**

K-10014FRL 360° swivel base

Double filtration system

All-Weather Flexibility (-40°C to 65°C)



HEPA (high-efficiency particulate air) filters are designed to capture all particles that are 0.3 microns or smaller

CARTRIDGE FILTERS

KVAC-1145 FITS: 8520LP, 8530LPN,

8531LP-B, 8540LSTN KVAC-1150 Fits: 8560LST



8520LP

- Powerful 3.5 Peak HP motor
 S US Gallon (20U)
 Comes complete with
 for x 1-1/4" thread-on
 hose, 3 pc. plastic
 extension wand,

20L dust bag, foam filter, reusable filter, 10" floor sweep and crevice tool

\$69.99

8530LPN

- Powerful 4 Peak HP motor
- cartridge filter, foam filter, reusable filter, 10" floor sweep



8540LSTN

- · Powerful 4 Peak HP motor 10 US Gallon (40L)
- Comes complete with
- 6 ft. x 1-1/4" hose, 2 pc. extension wand, 40L dust bag, cartridge filter, foam filter,

reusable filter, 10" floor sweep and crevice tool







\$299.99

2000W GASOLINE DIGITAL INVERTER GENERATOR

KCG-2001i

- Powerful 3 HP, 4 stroke air cooled motor
- · Sine wave digital inverter generator provides stable current to power voltage-sensitive electronics
- DC USB port: 5V/2.1 Amp.
- DC cigarette lighter socket: 12V/8 Amp. DC output
- AC duplex outlet: 120V/20 Amp.



KCG-3800i-DF • Powerful 5 HP, 4 stroke air cooled motor Sine wave digital inverter generator provides stable

DIGITAL INVERTER GENERATOR

current to power voltage-sensitive electronics Duplex outlets: 120V/20 Amp. AC

3800W DUAL FUEL

GASOLINE/PROPANE

- Twist lock outlet: 120V/30 Amp. AC
- DC USB ports (A & C): 5V/2.1 Amp. DC output for charging smartphones, tablets or any USB powered equipment





FUEL®

Powerful 8 HP, 4 stroke air cooled motor

5000W DUAL FUEL

GASOLINE/PROPANE

- Sine wave digital inverter generator provides stable current to power voltage-sensitive electronics
- DC USB port: 5V/2.1 Amp.

KCG-5000i-DF

DC cigarette lighter socket: 12V/8 Amp. DC output

DIGITAL INVERTER GENERATOR

- AC duplex outlet: 120V/20 Amp. AC output
- AC twist lock outlet: 120V/30 Amp. AC output



USB CE















Comes with propane tank connection cable, Nema L5-30P/Nema TT30R RV adaptor



Optional K-X2P Parallel Cable Kit for connectivity between two inverters \$99.99

Comes with propane tank connection cable, Nema L5-30P/Nema TT30R RV adaptor





15000W v-twin gasoline generator **PALLET TRUCKS** 5,500 lbs capacity

KC-2145N-NYL (21" X 45")

Nylon wheels

KC-2748N-NYL (27" X 48") Nylon wheels

KC-2748NP (27" X 48") Poly wheels



WITH ELECTRIC START

KCG-15000GE

- Powerful 20 HP, V-Twin horizontal shaft 4 stroke air cooled motor
 - AVR system and
- electronic ignition Two duplex outlets:
- 120V/20 Amp. AC Twist lock outlet:
- 120V/30 Amp. AC Outlet: 120V/240V/50 Amp. AC
- AC double throw circuit breaker and resets
- Terminals: 12V/8.3 Amp DC with DC reset

AUTO-IDLE DOWN FUNCTION extends running time by automatically adjusting engine speed to idle when not under load



GASOLINE ENGINES <u>WATER PUMP HOSE KI</u>

3" X 25 ft

\$89.99

KW-502

2" X 50 ft

KW-503

3" X 5<u>0</u> ft

\$119.99

Ideal for compressors, generato pressure washers, go-karts and

Counterclockwise drive shaft direction

KCG-65

Powerful 6.5 HP 4 stroke air cooled OHV \$229

KCG-130 Powerful 13 H 4 stroke air

cooled OHV engine

\$449

10

Each hose kit comes with a type A threaded camlock adaptor

CLEAR PVC REINFORCED \$119.99 SUCTION HOSES KW-252 2" X 25 ft **\$199**.⁹⁹ KW-253

> FLAT PVC **DISCHARGE HOSES**



GASOLINE WATER PUMPS

105' (KCG-2WPG) or 92' (KCG-3WPG) total head lift (total height at sea level, to which water can be raised above original water level)

· Oil sensor shuts off engine when oil level is low Comes with 3 wire clamps, 2 hose adapters, 2 rubber gaskets, strainer basket and strainer







GASOLINE/PROPANE GENERATORS

PORTABLE GASOLINE GENERATORS

1800W GASOLINE GENERATOR

KCG-1501GX

- · Powerful 3 HP, 4 stroke air cooled OHV engine
- Low oil shut-off with indicator light
 Duplex Outlet: 120V/11.6 Amp. AC output
- · Terminals: 12V, 8 Amp. DC output

\$379.99

5100W GASOLINE GENERATOR WITH WHEEL KIT


KCG-5100G

- Powerful 8 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignition
 Low oil shut-off with indicator light
 Two duplex outlets: 120V/20 Amp AC
- Twist lock outlet: 120V/240V/30 Amp AC

\$449,99



GASOLINE/PROPANE GENERATOR WITH ELECTRIC START KCG-5101GE-DF



AVR system and electronic ignition

· Low oil shut-off with indicator light Two duplex outlets: 120V/20 Amp. AC

Twist lock outlet: 120V/240V/30 Amp. AC

 Keyed electric start and easy start recoil starter

 AC double throw circuit breaker and resets for safe operation

\$599.99



6500W GASOLINE GENERATOR WITH ELECTRIC START

& WHEEL KIT

KCG-6502GE

- Powerful 10 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignition
- Low oil shut-off with indicator light
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC



10000W GASOLINE GENERATOR WITH ELECTRIC START

KCG-10001GE

- Powerful 15 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignitio · Low oil shut-off with indicator
- light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Two twist lock outlets: 120V/30 Amp. and 120V/240V/30 Amp. AC

\$899.99



12000W GASOLINE GENERATOR WITH ELECTRIC START

KCG-12000GE

- Powerful 18 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignitio Low oil shut-off with indicator ligh
- protects the engine Two duplex outlets:
- 120V/20 Amp. AC

FUEL

- Twist lock outlet: 120V/240V/30 Amp. AC
- Outlet:

120V/240V/50 Amp. AC



\$999.99

12000W DUAL/FUEL

GASOLINE/PROPANE GENERATOR WITH ELECTRIC START KCG-12001GE-DF

- Powerful 18 HP, 4 stroke air cooled OHV engine
 AVR system and electronic ignition
 Low oil shut-off with indicator light
 Duplex outlet: 120V/20 Amp. AC

- Twist lock outlet: 120V/240V 30 Amp. A0
- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start recoil starter
- AC double throw circuit breaker and resets
- Terminals: 12V/8.3 Amp DC and DC reset



\$649.99

GENERATOR EXTENSION CORDS Converts a Nema L14-30P 240V 30 Amp Twist Lock plug into Nema 5-15/20R 120V 20A receptacles

K-L1430-10 Extension cord length:

Gauge (AWG)/Cord:

Extension cord length: 25 feet Gauge (AWG)/Cord: 10 (SJTW 4/C)

Gauge (AWG)/Cord: 10 (STW 4/C)

K-L1430-25-4T Extension cord length: 25 feet

\$99.99

K-L1430-25EXT Extension cord length:

25 feet

50 AMP. GENERATOR ADAPTOR CORD Nema 14-50P 120/240V plug to Nema L14-30R 120/240V twist lock receptacle K-1450P-2 Cord length: 1.5 feet Gauge (AWG)/Cord: 10 (STW 4/C)

GENERATOR HOME CONNEC K-X7500

Outdoor to indoor receptacle kit Comes with 6 outlet power panel, generator power inlet box, 1/2" rigid PVC conduit, 1-1/4" spade bit, 1/2" PVC sleeve connector, 2 insulating gaskets and mounting hardware

POWER FORCE IDUAL FUEL

Gauge (AWG)/Cord: 10 (SJTW 4/C) K-L1430R-25

\$69.⁹⁹

\$109.99

